


NOTES:

1. APPLICABLE STANDARDS / SPECIFICATIONS:  
A. ASME Y14.5-2009 DIMENSIONING AND TOLERANCING
2. ITEM IDENTIFICATION:  
MARK OR ATTACH A LABEL TO INDICATE PART NUMBER AND REVISION LEVEL OF COMPONENT.
3. TO BE MADE OUT OF TIN PLATED COPPER WITH RED POWDER COAT COVERING ALL SURFACES EXCLUDING WHERE NOTED.


REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED BY
	A	INITIAL RELEASE	2021-MAY-25	GCRET

Ø.875  
NO COATING  
CENTERED ON HOLES

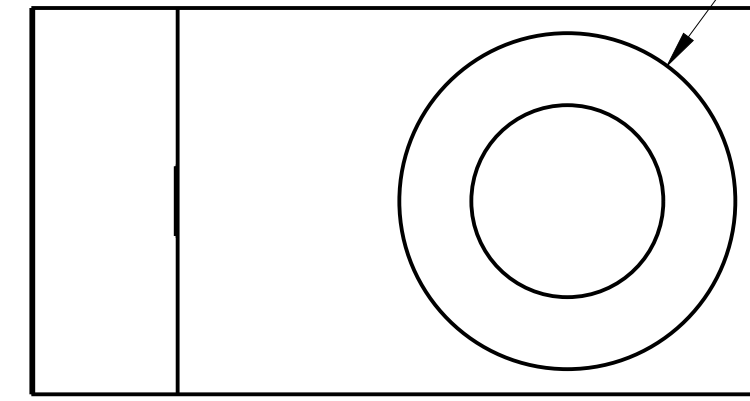


TOP

NO COATING

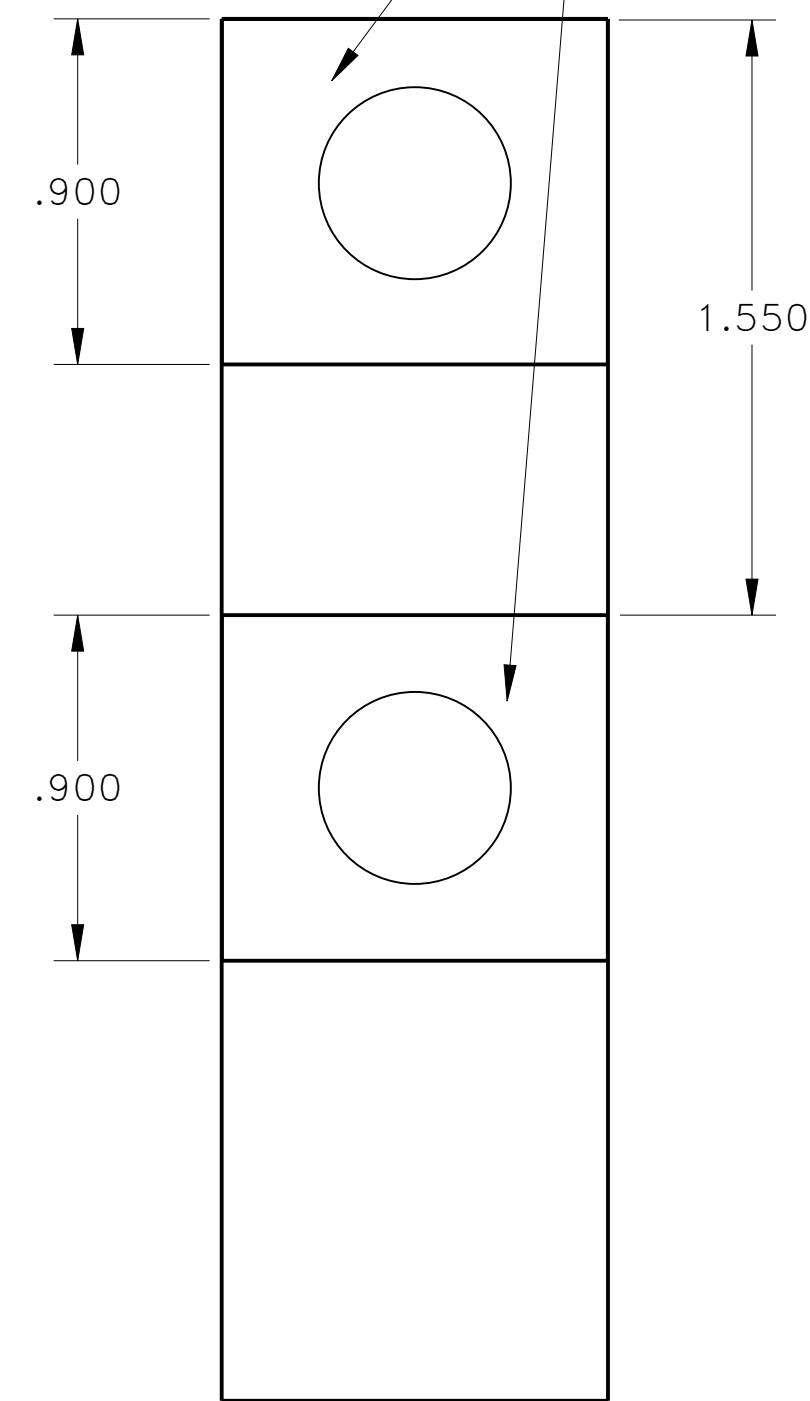


BACK

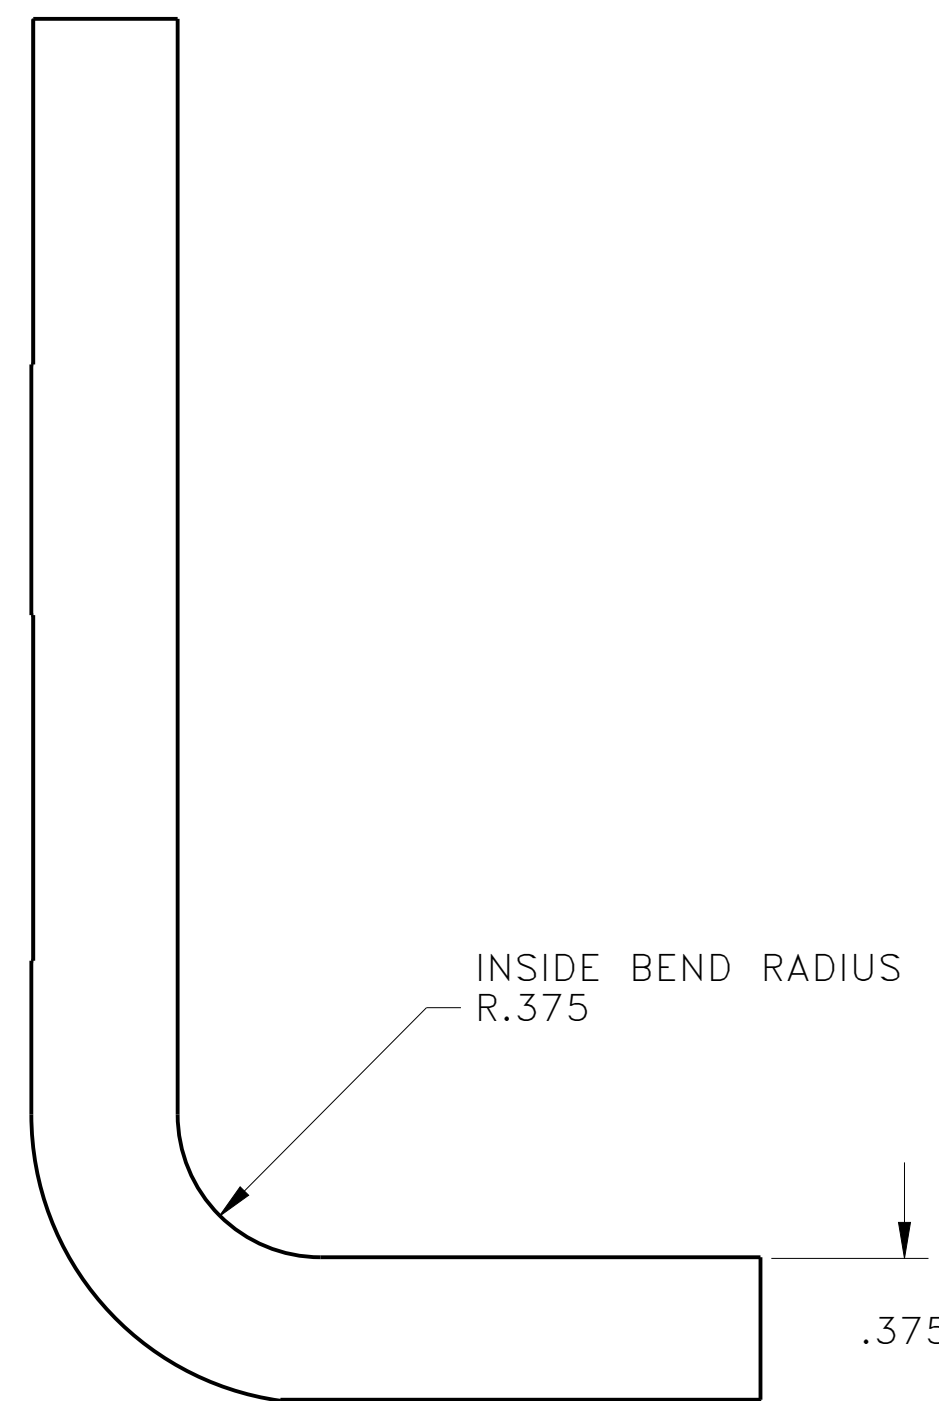


SIDE

2X Ø.875  
NO COATING  
CENTERED ON HOLES


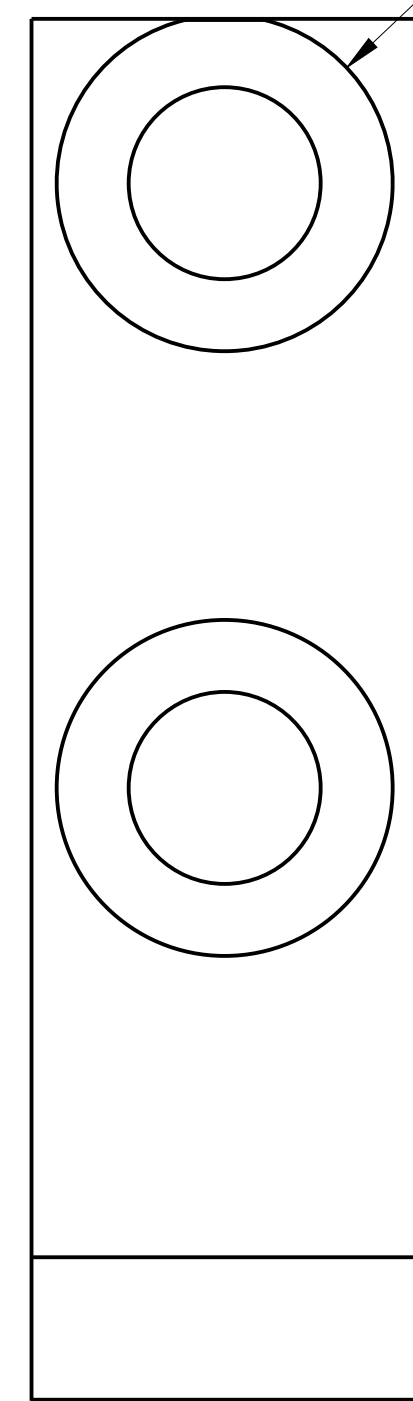


FRONT

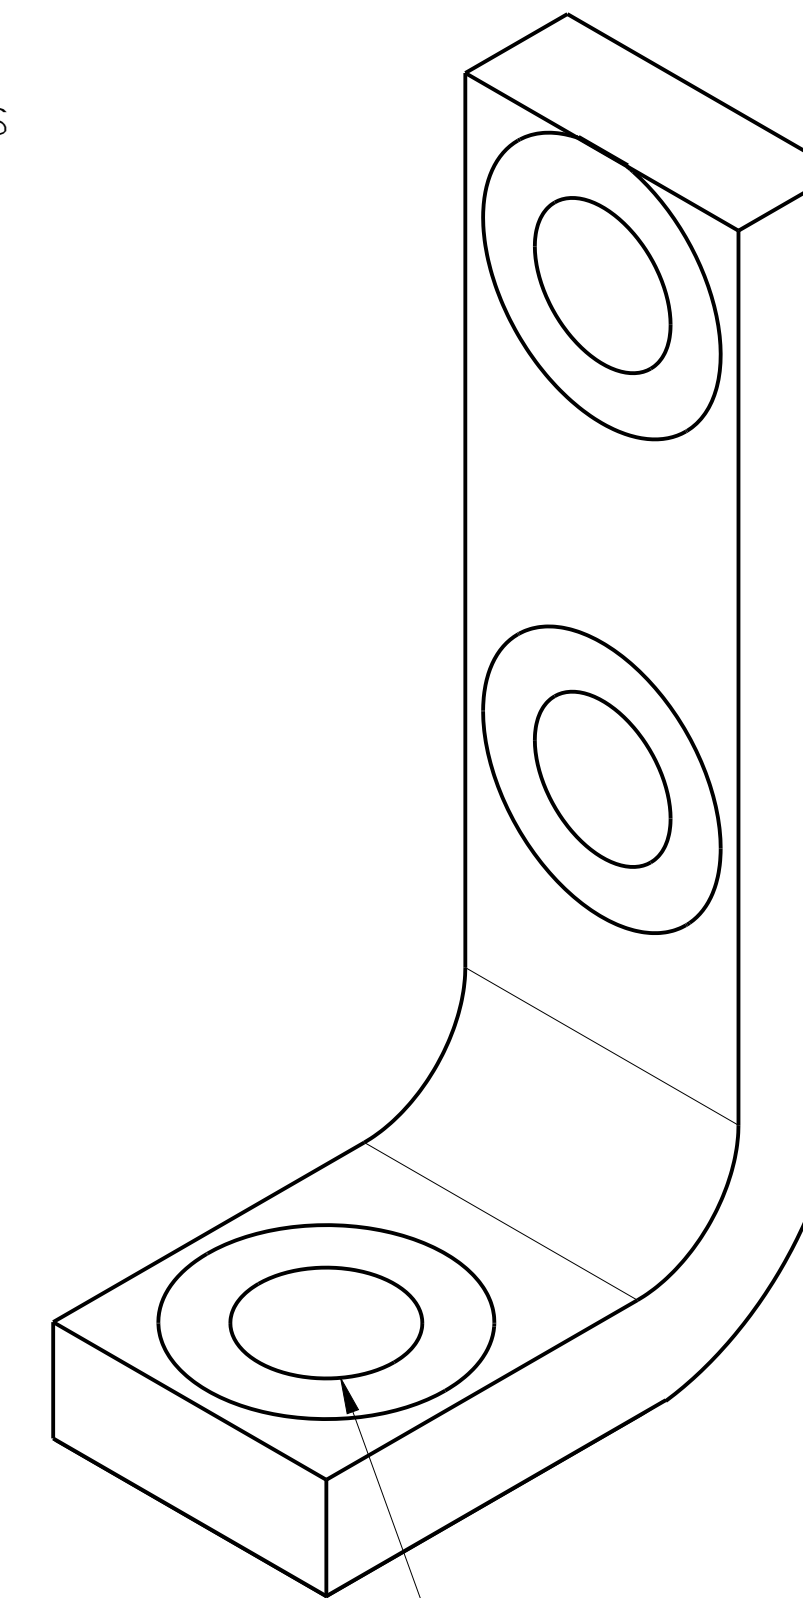

TO BE SUPPLIED 1X:  
Brass Hex Head 3/8"-16 , 1 1/2"  
Brass locknut 3/8"-16  
2 x 3/8" Washer

90.00°  
BEND UP 1.558

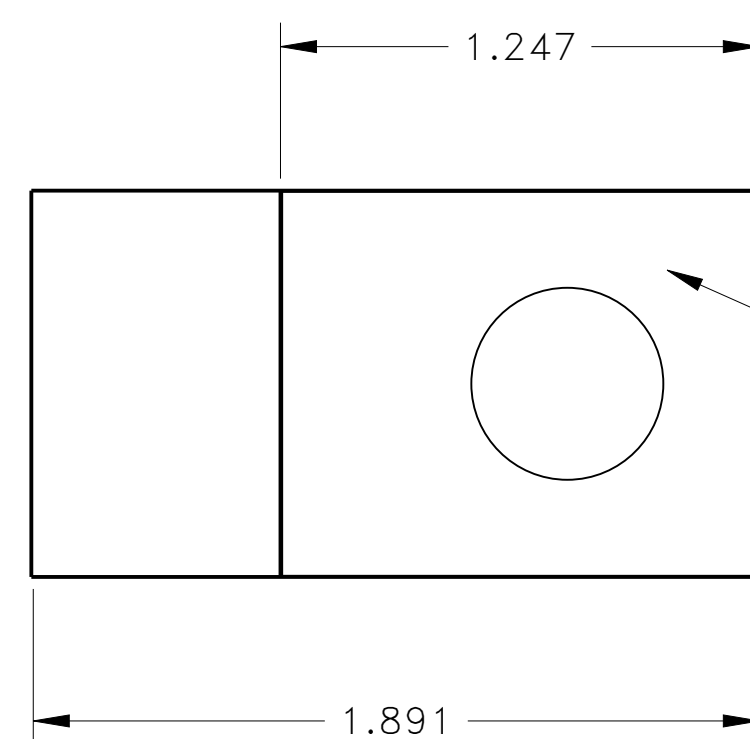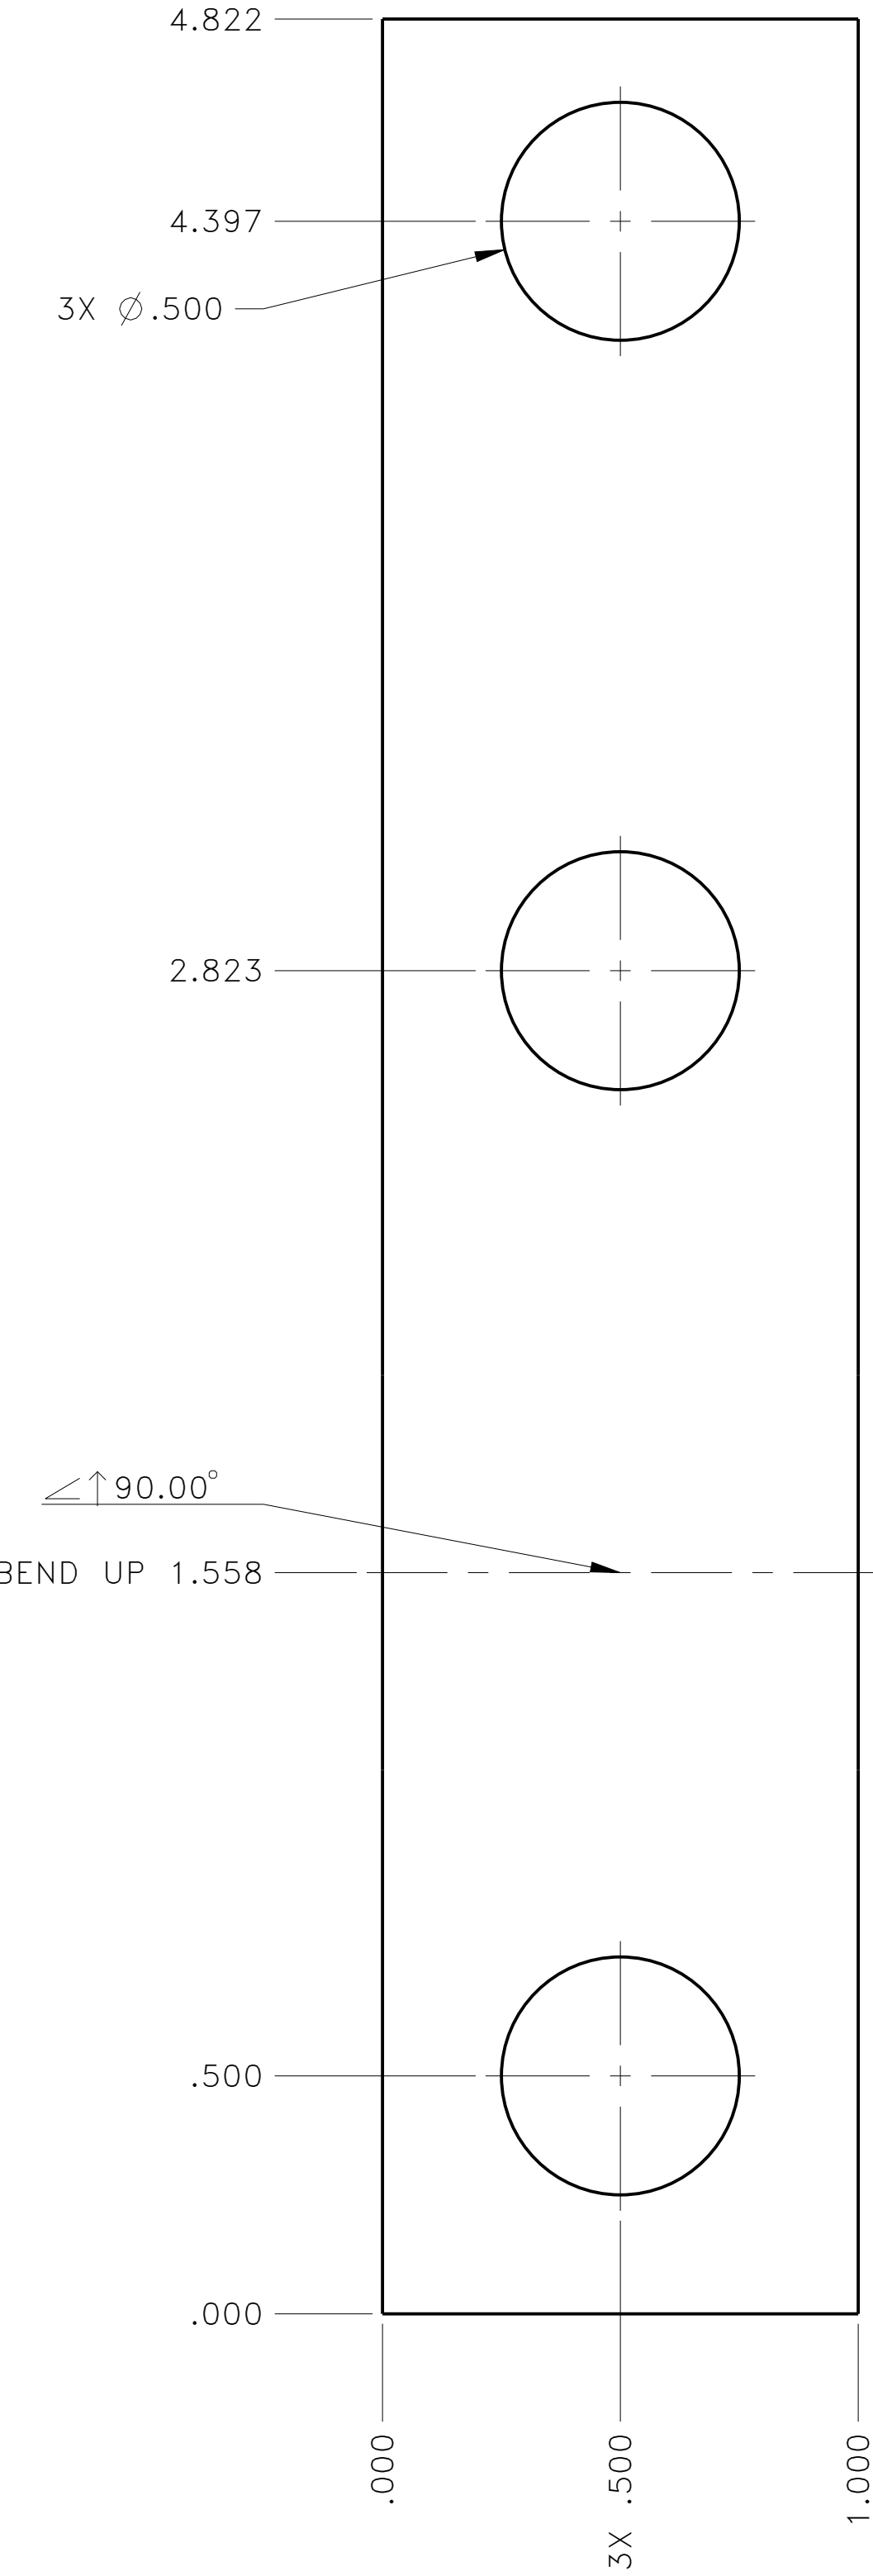

BOTTOM

NO COATING

THIS IS A COMPUTER GENERATED DRAWING.  
DO NOT UPDATE MANUALLY.

**E-ONE, INC. PROPRIETARY**

DISTRIBUTION STATEMENT:  
THIS DOCUMENT CONTAINS E-ONE PROPRIETARY  
DATA THAT IS PRIVATE AND PRIVILEGED. THIS  
DOCUMENT SHALL BE MAINTAINED IN CONFIDENCE  
AND SHALL NOT BE USED FOR MANUFACTURE,  
DISCLOSED, OR REPRODUCED IN WHOLE OR IN  
PART WITHOUT THE EXPRESSED WRITTEN CONSENT  
OF E-ONE, INC.

INTERPRET DRAWING PER ASME Y14.5-2009

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES

TOLERANCES

ANGLES ± .1°

FRACTIONS ± 1/32

DECIMALS ± .001, .002, .005, .010, .015, .031

BROKEN EDGES .015 MAX.

FILLETS R.015 MAX.

PART(S) SHALL BE FREE OF BURRS

SURFACE ROUGHNESS 125/

DO NOT SCALE THIS DRAWING

THIRD ANGLE PROJECTION



DATE	2021-MAY-25
DRAWN BY	CGLOETZNER
ENGINEER	
CHECKED BY	TCUPPY
DRAWING APPROVAL	GCRET
DESIGN APPROVAL	GCRET
SIMILAR TO	

E-ONE, INC.  
1601 S.W. 37TH AVENUE  
OCALA, FLORIDA 34474

BAR MPD DBL PULL BRIDGE 2021

SIZE	D	CAGE CODE	8P082	DRAWING NUMBER	1122850
SCALE	2.000	UNIT WT		SHEET	1 OF 1