

All door functions on 3 or 4 wires - CAN 2.0B (J1939) and LIN interfaces - extremely simple
Heavy duty current limited and thermally protected full bridge power window motor with pinch protection.
Full bridge lock driver supports motorized or solenoid lock actuators.

Four Auxiliary lighting circuits support blinkers, ground lights, step lights and marker lights.

LIN expansion interface supports:

- Security Keypad

- Local Window and Lock user controls


- Power mirror and Mirror heater (single and dual power mirrors)

Supports remote CAN switches and LIN switches

Anti tamper, and Anti theft immobilizer

Interface to auto unlock and vehicle start system (unlock and start on alarm)

Door Module - Advanced - Heavy Duty Vehicle

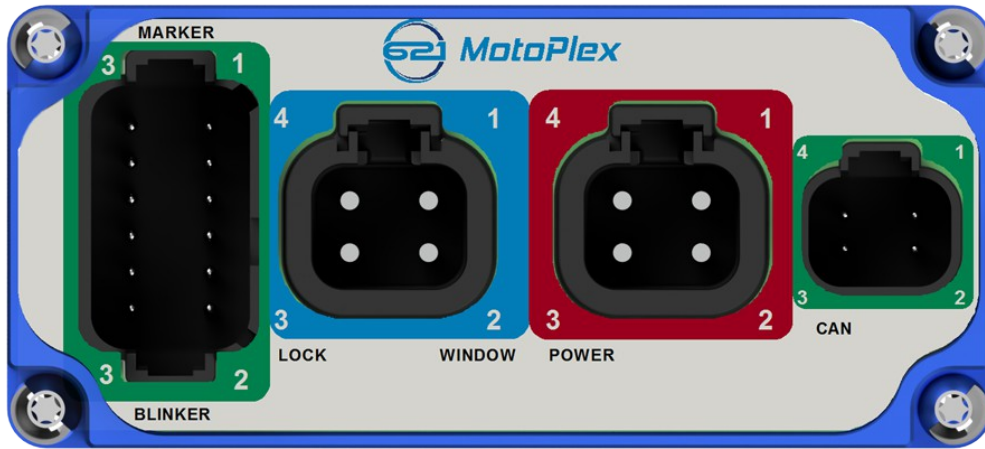

All door functions on 3 or 4 wires to Chassis

Part Number	ADMA-HD002	

Package	
Part Number	ADMA-HD002
Length	6.14" (156 mm)
Height	2.52" (64 mm)
Depth	1.58" (40 mm)
Frame Material	Aluminum
Finish	Powder coat
Environmental	
Operating / Storage Temp	-40°C to 85°C / -50°C to 85°C 100% Relative Humidity
Electrical	
Voltage (Power)	6.5-38 VDC
Communication	
Protocols	CAN / J1939 LIN