
			2		3			4		5		6	
			_	FT	<u>_</u>]					J2		J3
					J1					48			
								$1\frac{1}{2}$ HEATSHI PRINTED PAR			J	6	J5
J1		J2		J3		J4		J5		J6			
	ASTER	J2 TO OUTR CONTR (DRIVER	RIGGER Oller	TO OUTR CONTR (DRIVER	RIGGER Oller	J4 TO OUTRI CONTRO (PASSENGER	gger Dller	J5 TO OUTR CONTRO (PASSENGI	IGGER Oller	J6 TO JACK CO (DRIVER	NTROLLER		
		TO OUTR CONTR	RIGGER OLLER FRONT)	TO OUTR	RIGGER Oller Rear)	TO OUTRI CONTRO (PASSENGEF	GGER DLLER R FRONT)	TO OUTR CONTRO (PASSENGI	IGGER Oller	TO JACK CO (DRIVER	NTROLLER	ID	TWISTED
TO VALVE MA		TO OUTR CONTR (DRIVER DEUTSCH	RIGGER OLLER FRONT)	TO OUTR CONTR (DRIVER	RIGGER Oller Rear)	TO OUTRI CONTRO (PASSENGEF	GGER DLLER R FRONT)	TO OUTR CONTRO (PASSENGE DEUTSCH	IGGER Oller Er Rear)	TO JACK CO (DRIVER	NTROLLER SIDE)	ID	TWISTED
TO VALVE MA DRC16-24 PIN # 1 2	SB	TO OUTR CONTR (DRIVER DEUTSCH PIN # 1 2	RIGGER OLLER FRONT) DT06-6S	TO OUTR CONTR (DRIVER DEUTSCH	RIGGER OLLER REAR) DT06-6S	TO OUTRI CONTRO (PASSENGEF DEUTSCH	GGER DLLER R FRONT) DT06-6S	TO OUTR CONTRO (PASSENGE DEUTSCH	IGGER DLLER ER REAR) DT06-6S	to jack co (driver deutsch	NTROLLER SIDE)	VBAT LIN	TWISTED
TO VALVE MA DRC16-24 PIN # 1 2 3 4 5	SB	TO OUTR CONTR (DRIVER DEUTSCH PIN # 1	RIGGER OLLER FRONT) DT06-6S	TO OUTR CONTR (DRIVER DEUTSCH	RIGGER OLLER REAR) DT06-6S	TO OUTRI CONTRO (PASSENGEF DEUTSCH	GGER DLLER R FRONT) DT06-6S	TO OUTR CONTRO (PASSENGE DEUTSCH	IGGER DLLER ER REAR) DT06-6S	to jack co (driver deutsch	NTROLLER SIDE)	VBAT LIN GND GND LIN	
TO VALVE MA DRC16-24 PIN # 1 2 3 4	SB	TO OUTR CONTR (DRIVER DEUTSCH PIN # 1 2	RIGGER OLLER FRONT) DT06-6S	TO OUTR CONTR (DRIVER DEUTSCH PIN #	RIGGER OLLER REAR) DT06-6S	TO OUTRI CONTRO (PASSENGEF DEUTSCH	GGER DLLER R FRONT) DT06-6S	TO OUTR CONTRO (PASSENGE DEUTSCH	IGGER DLLER ER REAR) DT06-6S	to jack co (driver deutsch	NTROLLER SIDE)	VBAT LIN GND GND	TWIS
TO VALVE MA DRC16-24 PIN # 1 2 3 4 5 6 7 8 9 10	SB	TO OUTR CONTR (DRIVER DEUTSCH PIN # 1 2	RIGGER OLLER FRONT) DT06-6S	TO OUTR CONTR (DRIVER DEUTSCH PIN #	RIGGER OLLER REAR) DT06-6S	TO OUTRI CONTRO (PASSENGEF DEUTSCH PIN #	GGER DLLER R FRONT) DT06-6S	TO OUTR CONTRO (PASSENGE DEUTSCH PIN #	IGGER DLLER ER REAR) DT06-6S	to jack co (driver deutsch	NTROLLER SIDE)	VBAT LIN GND GND LIN VBAT VBAT LIN GND GND	TWIS TWIS TWIS
TO VALVE MA	SB	TO OUTR CONTR (DRIVER DEUTSCH PIN # 1 2	RIGGER OLLER FRONT) DT06-6S	TO OUTR CONTR (DRIVER DEUTSCH PIN #	RIGGER OLLER REAR) DT06-6S	TO OUTRI CONTRO (PASSENGEF DEUTSCH PIN #	GGER DLLER R FRONT) DT06-6S	TO OUTR CONTRO (PASSENGE DEUTSCH PIN #	IGGER DLLER ER REAR) DT06-6S	TO JACK CO (DRIVER PIN #	NTROLLER SIDE)	VBAT LIN GND GND LIN VBAT VBAT LIN GND GND LIN VBAT VBAT	TWIS TWIS TWIS TWIS
TO VALVE MA	SB CODE J J J J J J J J J J J J J	TO OUTR CONTR (DRIVER DEUTSCH PIN # 1 2	RIGGER OLLER FRONT) DT06-6S CODE	TO OUTR CONTR (DRIVER DEUTSCH PIN #	RIGGER OLLER REAR) DT06-6S CODE	TO OUTRI CONTRO (PASSENGEF DEUTSCH PIN #	GGER DLLER FRONT) DT06-6S CODE	TO OUTR CONTRO (PASSENGE DEUTSCH PIN #	IGGER DLLER ER REAR) DT06-6S CODE	to jack co (driver deutsch	NTROLLER SIDE) DT06-6S CODE	VBAT LIN GND GND LIN VBAT VBAT LIN GND GND LIN VBAT	TWIS TWIS TWIS TWIS TWIS

04/2 201 1/141 20	PIN CODE	PART #	TOTAL
J 0462-201-16141 30	J	0462-201-16141	30

*IF APPLICABLE TWISTING SHOULD NOT BE LESS THAN ONE TWIST PER INCH UNLESS OTHERWISE SPECIFIED

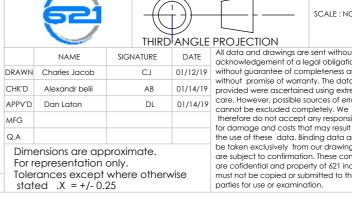

\\Network\192.168.3.100\home

F

						A
] J4					В
	WIRE					С
PAIRS	COLOR	AWG	LENGTH	(INCH)		
ED ED	RED BLUE BLACK BLACK BLUE RED	16 18 16 16 18 18	52 52 52 52 52 52 52 52 52			D
ED	RED BLUE BLACK	16 18 16	52 52 52	/2 /2 /2		
ED ED	BLACK BLUE RED BLUE BLACK	16 18 16 16 18 16	52 52 52 52 52 52 52	/2 /2 /2 /2 /2		
NONE	DO NOT SC	ALE DRAV	WING	Revisic)N 1	.0
iout ation, s and ata	621 T		ologie WIRING			
xtreem error /e onsibility sult from	OUT		R CONT			
a are to rings that contents inc., so it o third	DIMENSIONS ARE IN		2P6-100-		A3 ET 2 OF	
						2