
MATING CONNECTOR			DEUTSCH DT06-6S	
FUNCTION	PIN		FUNCTION	
CAN LO	6	1	DT POWER	
CAN HI	5	2	LIN	
DT SPARE	4	3	GND	


JACK LEFT POWER & LIN DATA					
MATING CONNECTOR DEUTSCH DT06-12SD					
FUNCTION	PIN		FUNCTION		
POWER FRONT LEFT	12	1	POWER FRONT RIGHT		
LIN	11	2	LIN		
GND	10	3	GND		
GND	9	4	GND		
LIN	8	5	LIN		
POWER BACK LEFT	7	6	POWER BACK RIGHT		

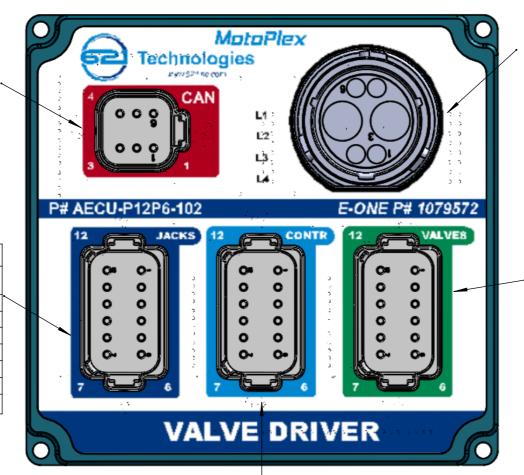

MATING CONNECTOR DEUTSCH HDP26-6SN			
PIN	FUNCTION		
1	CAN HI		
2	CAN LO		
3	VBAT		
4	GND		
5	LIN		
6	DT SPARE		

HYDRAULIC VALVE SOLENOIDS					
MATING CONNECTOR DEUTSCH DT06-12SA					
FUNCTION	PIN		FUNCTION		
FRONT LEFT IN	12	1	FRONT RIGHT IN		
FRONT LEFT OUT	11	2	FRONT RIGHT OUT		
!JVALVES_RETURN	10	3	!JVALVES_RETURN		
!JVALVES_RETURN	9	4	!JVALVES_RETURN		
BACK LEFT IN	8	5	BACK RIGHT IN		
BACK LEFT OUT	7	6	BACK RIGHT OUT		

MATING CONNECTOR DEUTSCH DT06-12SB				
FUNCTION	PIN			FUNCTION
MASTER PANEL POWER	12	CONTROL PANEL	1	SLAVE PANEL POWER
LIN	11		2	LIN
GND	10		3	GND
LADDER_JACK_VALES_RETURN	9	LADDER/JACK VALVES	4	LADDER_JACK_VALES_RETURN
JE_P8	8		5	JE_P5
JE_P7	7		6	JE_P6

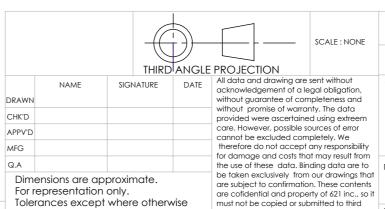

stated .X = +/-0.25

are cofidential and property of 621 inc., so it must not be copied or submitted to third

parties for use or examination.

**PINOUT** 

DO NOT SCALE DRAWING

621 Technologies inc.

AECU-P12P6-102

DIMENSIONS ARE IN INCHES UNLESS UNTIL SPECIFIED SHEET 2 OF 2

REVISION 1.0

\\Network\192.168.3.100\home