


UNIBOX 2019

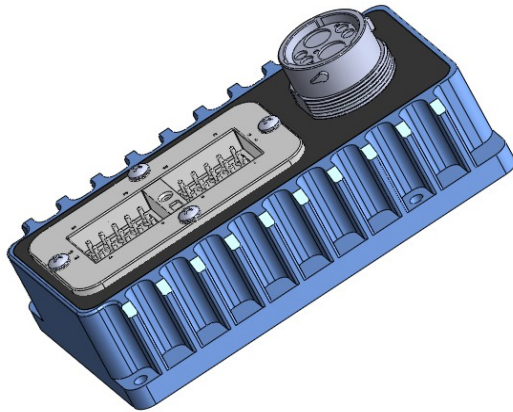


The device is designed for mobile applications and features robust packing, wide temperature and voltage tolerance as well as strong EMI and ESD immunity.

It features an ARM micro-controller running the 621 co-operative multi-tasking kernel to provide a light high performance solution with start-up times as low a couple of Milliseconds.

Protocols include Generic CAN or J1939.

Part Number	AECU-UNIBOXC	UNIBOX 2019

Package	
Part Number	UNIBOX 2019
	
Length	6.38" (162 mm)
Height	3.75" (95 mm)
Depth	2.37" (60 mm)
Frame Material	Diecast Aluminum
Finishing	Powder Coating
Environmental	
Operating / Storage Temp	-40°C to 85°C / -50°C to 85°C
Electrical	
Voltage (Power)	6.5-38 VDC
Communication	
Protocols	CAN / J1939
Baud Rate	250 kBit/s