


## 12 CHANNEL 13A VALVE CONTROLLER

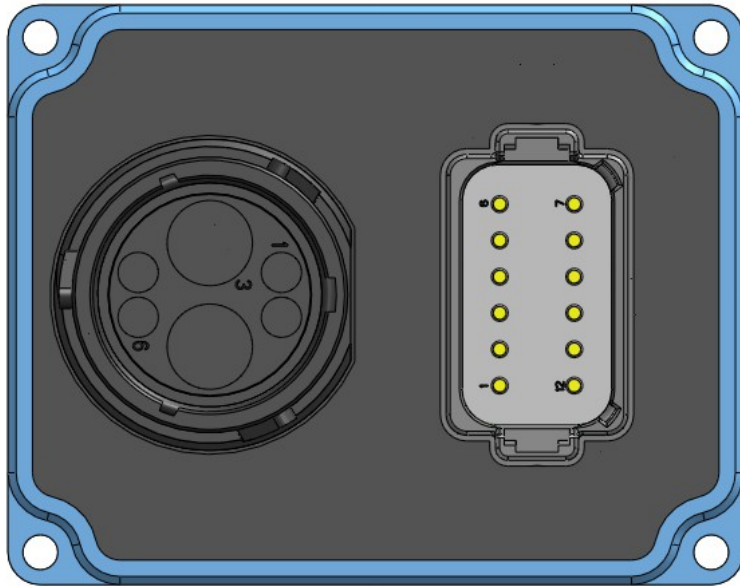

The device is designed for mobile applications and features robust packing, wide temperature and voltage tolerance as well as strong EMI and ESD immunity.

It features an ARM micro-controller running the 621 co-operative multi-tasking kernel to provide a light high performance solution with start-up times as low as a couple of milliseconds.

Protocols include Generic CAN or J1939.

Part Number	AEVC-H12-100	Valve Controller

Package	
Part Number	AEVC-H12-100
Length	3.54" (90 mm)
Height	2.80" (71 mm)
Width	2.21" (56 mm)
Frame Material	Diecast Aluminum
Finishing	Powder Coating
Environmental	
Operating / Storage Temp	-40°C to 85°C / -50°C to 85°C
Communication	
Data Sampling	10 to 20 bits
Protocols	CAN / J1939
Baud Rate	250 kBit/s