


J1 To AVDR-J2A3-CD4-001  AMPSEAL 770680-1		J2 To the VEHICLE APTIV 54201416		WIRE				
								TWISTED PAIRS*
				PIN #	CODE	PIN #	CODE	IMISIED LAIKS
1	W	1	Х	TWISTED PAIRS	POWER	RED	18	23
2	W	8	Х		0V	BLACK	18	23
14	W	2	X	TWISTED PAIRS	CAN1 HI	WHITE	20	23
15	W	9	Х		CAN1 LO	BLACK	20	23
21	W	4	Х	TWISTED PAIRS	CAN2 HI	WHITE	20	23
22	W	11	Х		CAN2 LO	BLACK	20	23
20	W	7	Х		ING	GREY	18	22
				WEDGE LOCK				
770678-1				PLUG				

PIN CODE	PART #	TOTAL
W	770520-1	7
X	54001301	7

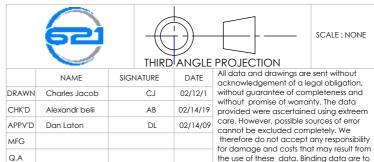

Dimensions are approximate. For representation only.
Tolerances except where otherwise stated .X = +/-0.25

for damage and costs that may result from the use of these data. Binding data are to be taken exclusively from our drawings that are subject to confirmation. These contents are cofidential and property of 621 inc., so it must not be copied or submitted to third parties for use or examination.

REVISION 1.0 DO NOT SCALE DRAWING

621 Technologies inc.

HARNESS FOR VDR KIT AVDR-J2A3-K1

AVDR-J2A3-H1

DIMENSIONS ARE IN INCHES UNLESS UNTIL SPECIFIED SHEET 2 OF 2

\*IF APPLICABLE TWISTING SHOULD NOT BE LESS THAN ONE TWIST PER INCH UNLESS OTHERWISE SPECIFIED

\\Network\192.168.3.100\home