


J1		J2		J3		J4		WIRE				
DEUTSCH	DT06-6S	DEUTSCH DRO	C16-40S	DEUTSCH	DT04-6P	DEUTSCH DR	C14-40PA	ID	TWISTED PAIRS*	COLOR	AWG	LENGTH (INCH)
PIN#	CODE	PIN #	CODE	PIN#	CODE	PIN #	CODE					
1	J	16	J					POWER	TWISTED PAIRS	RED	18	5 1/2
3	J	17	J					GND		BLACK	18	5 1/2
5	J	18	J					CAN HI	TWISTED PAIRS	YELLOW	18	5 1/2
6	J	19	J					CAN LO		GREEN	18	5 1/2
				1	T	16	Т	POWER	TWICTED DAIDS	RED	18	5 1/2
				3	T	17	T	GND	TWISTED PAIRS	BLACK	18	5 1/2
				5	T	18	T	CAN HI	TAUCTED DAIDS	YELLOW	18	5 1/2
				6	Т	19	T	CAN LO	TWISTED PAIRS	GREEN	18	5 1/2
W6S				W6P				WEDGE LOCK				
0413-217-1605		0413-217-1605		0413-217-1605		0413-217-1605		PLUG]			

PIN CODE	PART#	TOTAL
J	0462-201-16141	8
T	0460-202-16141	8

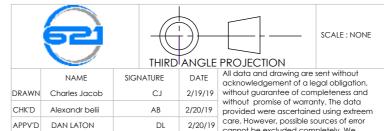

Dimensions are approximate. For representation only.
Tolerances except where otherwise stated .X = +/-0.25

MFG

Q.A

cannot be excluded completely. We therefore do not accept any responsibility for damage and costs that may result from the use of these data. Binding data are to be taken exclusively from our drawings that are subject to confirmation. These contents are cofidential and property of 621 inc., so it must not be copied or submitted to third parties for use or examination. DO NOT SCALE DRAWING

REVISION 1.0

621 Technologies inc.

T- CASE PROGRAMMER ADAPTER CABLE

AATTC-001-H6

DIMENSIONS ARE IN INCHES UNLESS UNTIL SPECIFIED SHEET 2 OF 2

*IF APPLICABLE TWISTING SHOULD NOT BE LESS THAN ONE TWIST PER INCH UNLESS OTHERWISE SPECIFIED

\\Network\192.168.3.100\home